

MK-72GD Three-section Glass Door Cooler



MK-72GD
Three-section
Glass Door Cooler

- 72 cubic foot capacity.
- Performance designed, factory balanced refrigeration system holds 33°F to 38°F.
- Exterior – non-peel or chip white vinyl laminated metal is durable and permanent.
- Interior – durable and attractive, NSF approved, white metal liner.
- Self-closing doors with positive seal, magnetic door gaskets.
- “Low-E”, double pane thermal glass door assemblies with extruded frames. The latest in energy efficient technology.
- Energy efficient interior LED lighting system.

- Entire cabinet structure is foamed-in-place using high density, CFC-free polyurethane insulation.

Bottom mounted units feature:

- “No-stoop” lower shelf to maximize product visibility.
- Easily accessible condenser coil for cleaning. Equipped with a reversing condenser fan motor which dramatically reduces maintenance costs and electrical consumption.



ISO 9001:2000
Quality System
Certified

Manitowoc
Foodservice Group

MK-72GD Three-section Glass Door Cooler

Specifications

Model	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Size (inches)			HP***	Volts	Amps	NEMA Config.	Cord Length (total ft.)	Crated Weight** (lbs.)
				W	D†	H*						
MK-72GD	3	72	15	78.6	31.7	82.0	3/4	115/60/1	13.4	5-20P	9	900

†Depth does not include 1.75" for door handle or grill. *Includes 3.00" legs. **Inventoried and factory shipped on standard pallet. ***Two 3/8 hp condensing units.

Project Name: _____
 Location: _____
 Item No.: _____ Qty: _____
 Model No.: _____

Standard Features

Design:

Koolaire has found the perfect balance between dependability, functionality, and affordability. Our high-quality components ensure that temperatures remain consistent; keeping products fresh and utility costs low. The glass doors and illuminated cabinet provide high visibility so that products inside get noticed.

Refrigeration System:

- Factory engineered self-contained, capillary tube system using environmentally friendly (CFC-free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F.
- Sealed, self-lubricating evaporator fan motors and large fan blades give Koolaire merchandisers a more efficient low velocity, high volume airflow design. This unique design assures faster temperature pull down of warm product, colder holding temperatures, and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance. "No-stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.
- Energy efficient electronics. Reversing condenser fan motor keeps the condenser clean, thus reducing wear and stress on the compressor, and significantly decreases service calls.
- Automatic hot gas evaporator water removal system.

Cabinet Construction:

- Exterior – non-peel or chip white laminated vinyl; durable and permanent.
- Interior – durable and attractive, NSF approved, white metal liner.
- Insulation – entire cabinet structure is foamed-in-place using high density, CFC-free polyurethane insulation.
- Cabinet supplied with 3" legs.
- Casters available at additional cost.

Doors:

- "Low-E", double pane thermal glass door assemblies with extruded frames. The latest in energy efficient technology.
- Each self-closing door fitted with ergonomically designed molded door handle.
- Magnetic door gaskets of one piece construction and removable without tools for ease of cleaning.

Shelving:

- Fifteen adjustable heavy duty coated wire shelves, 21.56" W X 24.13" D.
- Shelves are adjustable on .5" increments.

Lighting:


- Safety shielded innovative LED interior lighting design.

Warranty:

One-year warranty on all parts and labor and an additional 4-year warranty on compressor. (U.S.A./Canada only).




UL listed to NSF-7 for the storage and/or display of packaged or bottled product.

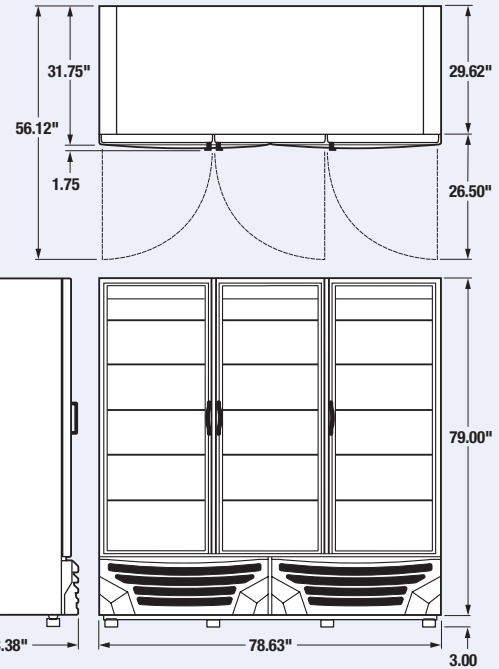

MK-72GD

Electric:

Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase – 20 amp dedicated outlet. Cord and plug set included.



©2007 Manitowoc 1107. Continuing product improvement may necessitate change of specifications without notice. 37268

MANITOWOC REFRIGERATION
 81 West Holly Street, P.O. Box 670
 Parsons, TN 38363, USA
 Ph: 888-732-2446 • Fax: 901-847-5552
 Visit us online at www.manitowocrefrigeration.com

